


# Clip mounting


## Eclipse Hive Fitting Instruction

When mounting the standard and motor/chain drive profile make sure that the distance between the clip and the end of the pleated blinds is 50 or 65 mm. **Mounting the pleated blind horizontally.** Use only one clip per cord and/or drilled hole.

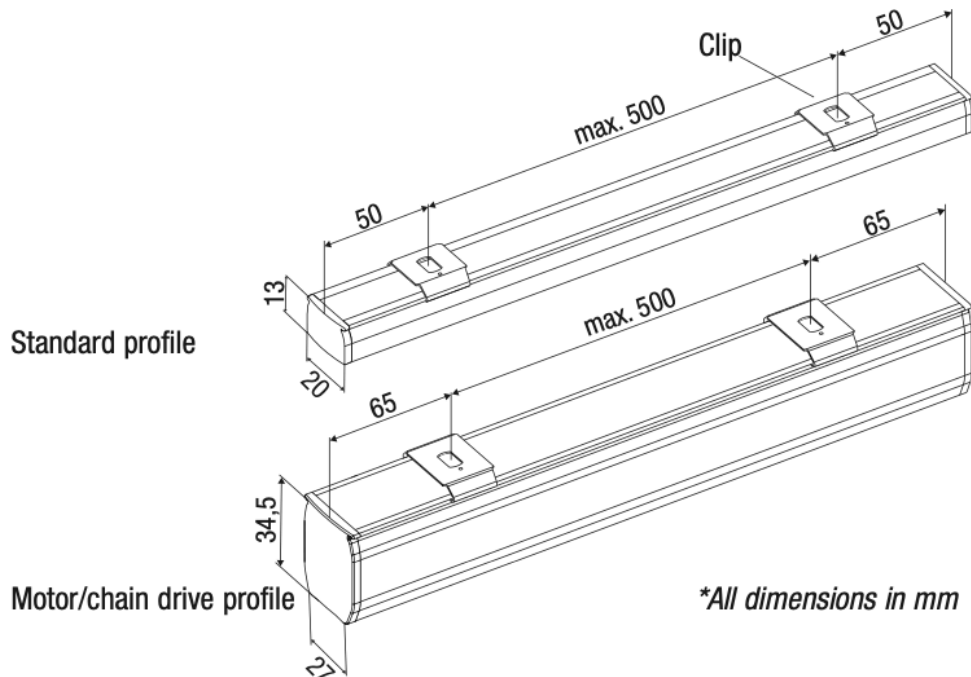

### Installation:

Insert the profile in the front edge of the clip and press the rear upwards (until it clicks).

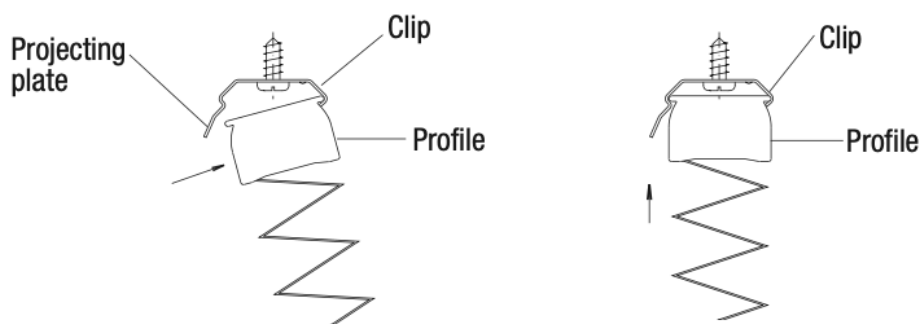

### Disassembly:

Press the projecting plate of the clip upwards to be able to remove the profile from the clip.

### Mounting positions:

In the case of a ceiling/wall mounting, make sure that the height of the fabric pack does not collide the tilted or opened wing of the window.