


SPECIFICATION



Sunwood® is a range of wooden venetian blinds offering a selection of 24 colours and three slat sizes 25mm, 35mm and 50mm.

SUNWOOD® VENETIAN BLIND - EXPLODED VIEW

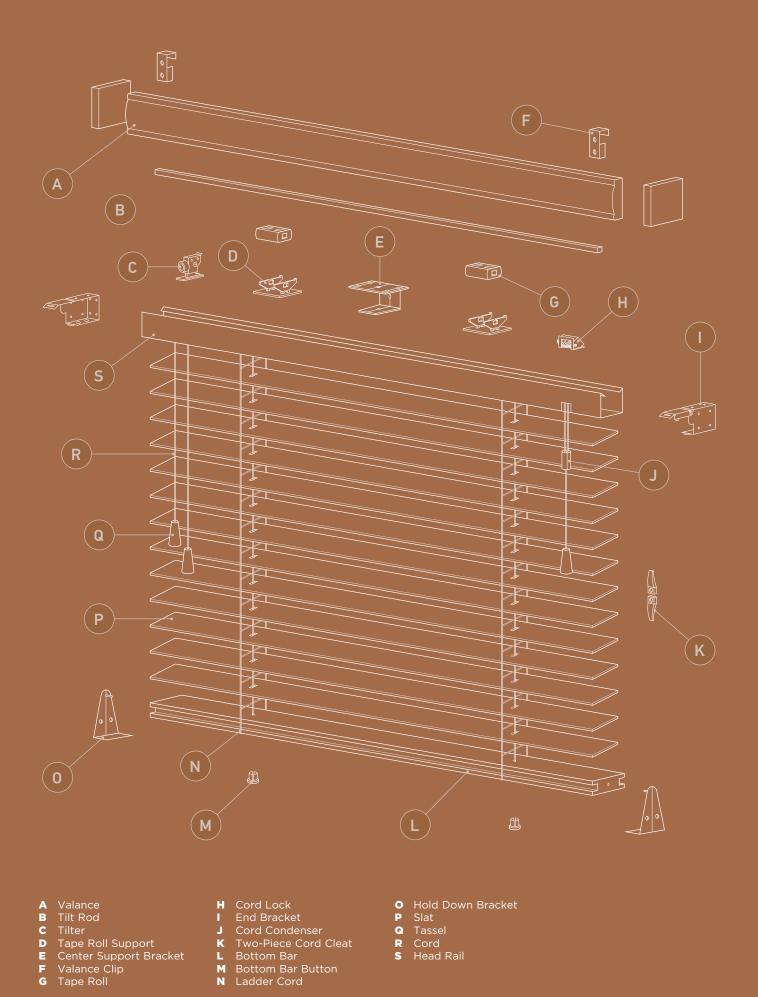

- Valance Tilt Rod A B

- Tilter
 Tape Roll Support
 Center Support Bracket
 Valance Clip
 Tape Roll D E
- F G

- O Hold Down BracketP Slat

- Q Tassel
 R Cord
 S Head Rail



PRODUCT INFORMATION FACT SHEET

SLAT WIDTHS	TAPE WIDTHS AVAILABLE
25mm	19mm
35mm	25mm
50mm	25mm or 38mm

The below chart shows the slat colours and the default tape colours for each.

SUNWOOD' COLOUR	SUNWOOD [*] RANGE	SLAT WIDTH AVAILABLE	DEFAULT TAPE COLOUR
Acacia	Soft Grain	50mm	Dove
Ash	Essential	25, 35, 50mm	Steel
Auburn	Essential	25, 35 , 50mm	Coffee
Carbon	Essential	25, 35, 50mm	Jet
Claro	Printed	50mm	Gallant
Fired Walnut	Soft Grain	50mm	Coffee
Gloss Crème	Gloss	50mm	Vanilla
Gloss Pure	Gloss	50mm	Cotton
Hazel	Essential	25, 35, 50mm	Jet
Honey	Essential	25, 35, 50mm	Toffee
Kalm	Essential	25, 35, 50mm	Lunar
Kohl	Essential	25, 35, 50mm	Slate
Mirren	Essential	25, 35, 50mm	Vanilla
Morena	Essential	25, 35, 50mm	Mist
Montana	Printed	50mm	Truffle
Nordic	Printed	50mm	Light Beige
Oregon	Essential	25, 35, 50mm	Hessian
Polar	Essential	25, 35, 50mm	Chalk
Pure	Essential	25, 35, 50mm	Cotton
Revera	Printed	50mm	Lunar
Tanza	Soft Grain	50mm	Gallant
Tawny	Essential	25, 35, 50mm	Hessian
Tuscan Oak	Soft Grain	50mm	Toffee
Urban Oak	Printed	50mm	Truffle

COLOUR COORDINATION

- All parts of the blind are colour coordinated.
- The headrail, bottom bar buttons and cord condenser are colour co-ordinated PVC.
- Slats, valance, bottom bar and toggles are all colour matched wood.
- Cords and ladder braid are colour matched to the wood colour.

DIMENSIONS OF SUNWOOD® HEADRAILS

25MM & 35MM	42mm height x 42mm depth
50MM	42mm height x 59mm depth

MINIMUM & MAXIMUM WIDTHS & DROPS

MINIMUM WIDTH	290mm
MINIMUM DROP	150mm
MAXIMUM WIDTH	2400mm
MAXIMUM DROP	3000mm


NUMBER OF LADDERS PER BLIND

25MM & 35MM SLATS	
WIDTH	NO. OF LADDERS
400mm - 750mm 2	
751mm - 1350mm 3	
1351mm - 1500mm 4	
1501mm - 2400mm	5


50MM SLATS		
WIDTH	NO. OF LADDERS	
290mm - 900mm	2	
901mm - 1350mm	3	
1351mm - 1650mm	4	
1651mm - 2400mm	5	

(Alternative box size may be used to cover OOS, at management discretion)

25/35MM SUNWOOD® HEADRAIL PUNCH POSITIONS

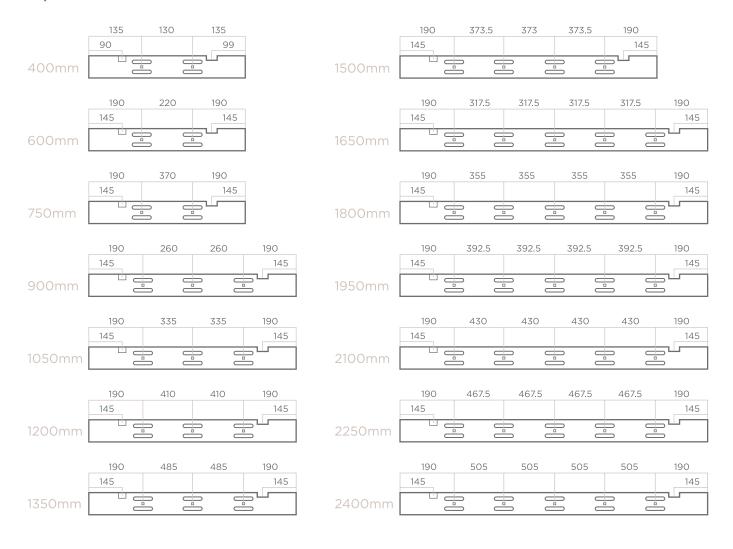


50MM SUNWOOD® HEADRAIL PUNCH POSITIONS

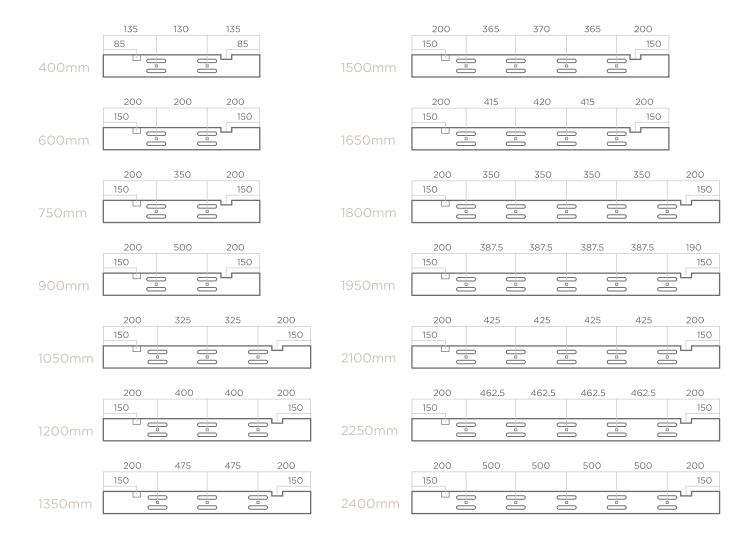

CONTROL OPTIONS

- Right hand raise, left hand tilt. (Standard)
- All controls on the Left.
- All controls on the Right.
- Raise on the Left, Tilt on the right.

*NB - All blinds between 290mm and 450mm must have standard controls.

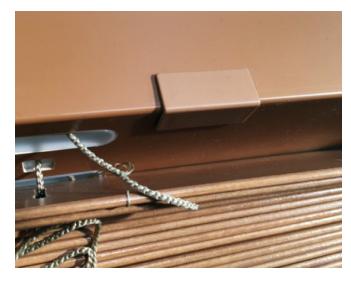

When standard controls are reversed a colour matched cover will be used to cover the original punch hole.

ACCESSORIES

TAPES

26 tape options are available:



20

Herringbone Weave tapes, available in 3 sizes;

19mm, 25mm and 38mm.



12

Flatweave tapes available in **38mm** only.

Herringbone Weave tapes are the standard tape default;

- 19mm tape for 25mm slat
- 25mm tape for 35mm slat
- 25mm and 38mm tape for 50mm slat

Flatweave tapes are an additional charge and charges are available as a separate price table.

Flatweave tapes are available as 38mm for 50mm slat only.

Each Sunwood* colour has a Decora recommended tape option which co-ordinates with the slat colour.

Customers can choose an alternative tape colour. (Flatweave tapes will have an additional charge applied)

Tapes are secured to the bottom of the bottom bar using complimenting tape pins

VALANCE RETURNS/PELMETS

PLAIN FINISH	Default. Valance will be 12mm longer than the headrail of the blind.
SINGLE RETURN	Supplied with one mitred return. Internal measurement 13mm. External measurement 29mm.
DOUBLE RETURN	Supplied with two mitred returns. Internal measurement 14mm. External measurement 45mm.

(Single and double returns can be attached to the pelmet prior to despatch if requested)

UNCUT	Valance will be left uncut and will be 50mm longer than the width of the blind. One end of the valance will be mitred and one will be straight.
SPECIFIED LENGTH	If a customer requests for a valance to be a specific length there will be no additional charge provided the valance is no longer than the blind width + 50mm. Any valance that is longer than this cannot be made from the valance supplied with the blind and will be charged as a valance extra.

ATTACHING THE VALANCE TO THE BLIND

Valance Clips or Dual Locks are used to secure the valance to the headrail. The dual locks are attached to the headrail of all Made to Measure blinds as standard with the valance clips included in the component box.

Additional Dual Locks can be sold individually through wholesale. The code is VC793.







Dual Locks

ADDITIONAL VALANCE OPTIONS

CONTOUR VALANCE

- Available for 25mm, 35mm and 50mm Essential Collection only
- Contour shape Basswood valance colour matched to slat. Attached to headrail using dual locks.
- 25mm & 35mm Valance size: **51mm x 6mm**
- 50mm Valance size: **64mm x 7mm**
- Contour valance comes as standard with a matching wood tassel. One size is used for both raise and tilt operation.
- Tassels are colour matched to slat.
- Additional charge for contour valance





Valance

Tassel

TASSELS

- Tassels will be colour matched wood as standard. There is also the option to have a metal Cylinder tassel (available in 4 colours)
- The raise will have 1 x large tassel and the lift will have 2 x small tassels.

CYLINDER TASSEL



WVH-TCCE



Matt Nickel
WVH-TCNL



Brushed Brass WVH-TCBS



Black WVH-TCBK

BRACKETS

As standard all Sunwood® Blinds are supplied with 2 box brackets.

These brackets can be fixed in a number of ways;

TOP FIX	Bracket is screwed on to the top of the window recess
END FIX	Bracket is screwed on to the side of the window recess
FACE FIX	Bracket is screwed on to the front of the window frame

Blinds with three or more ladders will have a centre support bracket. For every additional ladder there will be an additional centre support bracket e.g. a 4 ladder blind will have 2 end support brackets and 2 centre support brackets. These brackets are top fix only.



Box Brackets

Centre Support Bracket

ALTERNATIVE BRACKETS

Alternative brackets are also available. These are called Swivel brackets shown on the right. They are also available as an extension bracket. These are available for both 25mm/35mm and 50mm.

The extension swivel brackets will extend the Sunwood* blind out from the window.



Swivel Bracket



Extension Swivel Bracket

DIMENSIONS

вох	25mm & 35mm	50mm deep x 47mm high
BRACKET	50mm	65mm deep x 47mm high
SWIVEL	SWIVEL 25mm & 35mm	47mm deep
BRACKET	50mm	65mm deep
EXTENSION	25mm & 35mm	Will extend the blind by 40mm (total size is 87mm)
SWIVEL BRACKET	50mm	Will extend the blind by 45mm (total size is 110mm)

HOLD DOWN BRACKETS

Hold down brackets are used to attach the bottom of the blind to a window or door to prevent it from swinging to and fro. There is a small hole on either end of the bottom bar. The hold down bracket is attached to the door with two screws then the tips of the brackets are inserted to the holes on the bottom bar.



Hold Down Bracket

SUNWOOD® GRAIN VARIANCE

As Suwnood venetians are made using a natural product there will be a degree of variation in the shading and grain type on each blind. Please see example of different variations in shading and grain.



STAINING SLAT ENDS

Customers can choose to have the ends of their slats stained. Additional 5% uplift.

Please Note: We do not recommend a wood product for areas of high moisture such as bathrooms or wet rooms as it may lead to issues over time.

STACK HEIGHT

The stacking height of a blind refers to the measurement from top to bottom when the blind is fully pulled up. These stacking heights should be treated as advice only. There is a slight variance in the slat thickness and in how the slats pack with the ladder therefore each individual blind will be different.

BLIND DROP (MM)	25MM SLAT STACK HEIGHT (MM)	35MM SLAT STACK HEIGHT (MM)	50MM SLAT STACK HEIGHT (MM)
500	125	115	105
750	155	145	130
1000	185	170	145
1250	220	195	170
1500	245	220	190
1750	275	245	210
2000	310	270	230
2250	335	300	250
2500	370	325	270
2750	400	350	290
3000	430	375	310

CHILD SAFETY

All Sunwood* blinds come with a colour co-ordinated cord condenser and a two-part safety cleat.

The cord condenser is designed to consolidate the pull cords into one string and also to break-away, stopping any loops from forming. The safety cleat is used to wrap the cord around to keep out of children's reach.



Closed Open Top Bottom







Cord wrapped in a figure of eight motion

CORD LENGTHS AND INSTALLATION HEIGHTS

- If the installation height is known the distance from the floor to bottom of pull cords shall be at least 1.5m.
- If the installation height is not known but the drop of the blind is less than 2.5m, length of the pull cords shall be less than 1m.
- If the installation height is not known but the drop of the blind is more than 2.5m, length of the pull cords shall be less than drop of the blind minus 1.5m.
- The standard control length on Sunwood® are 2/3 the drop of the blind.
- If the control length is not within the child safety rules it will be reduced to the max length allowed by child safety.

All blinds are supplied with compliant warning stickers and warning tags.

MOTORISATION

Sunwood venetian blinds can be motorised to offer ultimate convenience of light control and privacy in the home. At the touch of a button you can raise, lower and tilt your blinds, especially convenient for blinds in hard to reach places.

*motorisation only available for 50mm slats without tapes.

SOMFY TILT & LIFT 25 RTS

A radio controlled battery powered motor suitable for small to medium blinds up to 2400mm wide and 2000mm drop. Somfy Tilt and Lift 25 RTS allows blinds to be raised, lowered and tilted with ease.

SOMFY SONESSE 40 RTS

A radio controlled, battery powered motor suitable for medium & large blinds up to 2400mm wide & 2800mm drop. Somfy Sonesse 40 RTS offers a quiet drive motor, allowing you to raise, lower & tilt your blinds smoothly.

*Somfy Sonesse 40 WT also available as a hard-wired option powered from your mains supply.

SOMFY TILT 50 RTS

A radio controlled battery powered motor suitable for all sizes of Sunwood blinds enabling convenient control of the tilt of your blind.

Voltage	12V DC
Power	9V DC - 14V DC
Torque	0.8Nm
Speed	30 rpm
Radio Freq	433,42 MHz
Width	540mm - 2400mm
Drop	150mm - 2000mm
Headrail	Headrail colour matched to wood slat
Control	Remote control, light sensor, wall switch or Connexoon and Somfy TaHoma smart boxes

Voltage	230 Vac
Power	207V - 253V AC
Torque	6 Nm
Speed	20 rpm
Radio Freq	433,42 MHz
Width	620mm - 2400mm
Drop	200mm - 2800 mm
Headrail	Aluminium headrail colour matched to wood slat
Control	Remote control, light sensor, wall switch or Connexoon and Somfy TaHoma smart boxes

Voltage	12V DC
Power	9V DC - 14V DC
Torque	0.6Nm
Speed	10 rpm
Radio Freq	433,42 MHz
Width	450mm - 2896mm
Drop	150mm - 3000mm
Headrail	Aluminium headrail colour matched to wood slat
Control	Remote control, light sensor, wall switch or Connexoon and Somfy TaHoma smart boxes



Somfy Tilt & Lift 25 RTS, Sonesse 40 RTS and Tilt RTS 50 can be combined with Somfy Connexoon and TaHoma smart boxes for optimal control of home automated products.

Single mount battery packs and dual mount battery packs are available. Requirements are dependent upon the blinds size.

SINGLE MOUNT BATTERY PACK

				W	DTH IN METR	ES		
		0.60	0.80	1.00	1.20	1.40	1.60	1.80
	0.60	1.7	1.7	1.6	1.6	1.6	1.5	1.5
ES	0.80	1.5	1.5	1.4	1.4	1.3	1.2	1.2
METRES	1.00	1.3	1.3	1.2	1.2	1.1	1	1
	1.20	1.2	1.1	1.1	1	1	0.9	0.8
Z	1.40	1	1	0.9	0.9	0.8	0.7	-
DROP	1.60	0.9	0.9	0.8	0.8	0.7	-	-
ద	1.80	0.8	0.8	0.7	0.7	-	-	-
	2.00	0.8	0.7	0.6	0.6	-	-	-



DUAL MOUNT BATTERY PACK

				w	IDTH IN METR	ES		
		0.60	0.80	1.00	1.20	1.40	1.60	1.80
	0.60	3.4	3.3	3.3	3.2	3.1	3	2.9
ES	0.80	3	2.9	2.8	2.7	2.6	2.5	2.4
METRES	1.00	2.6	2.5	2.4	2.3	2.2	2.1	1.9
Σ	1.20	2.3	2.2	2.1	2	1.9	1.7	1.6
Z	1.40	2.1	2	1.9	1.7	1.6	1.5	-
DROP	1.60	1.9	1.7	1.6	1.5	1.4	-	-
ᆸ	1.80	1.7	1.6	1.4	1.3	-	-	-
	2.00	1.5	1.4	1.3	1.2	-	-	-




We recommend dual batteries for blinds in the 'Blue' zone.

^{**} Minimum cut down 75cm down to 54cm.




SPECIFICATION

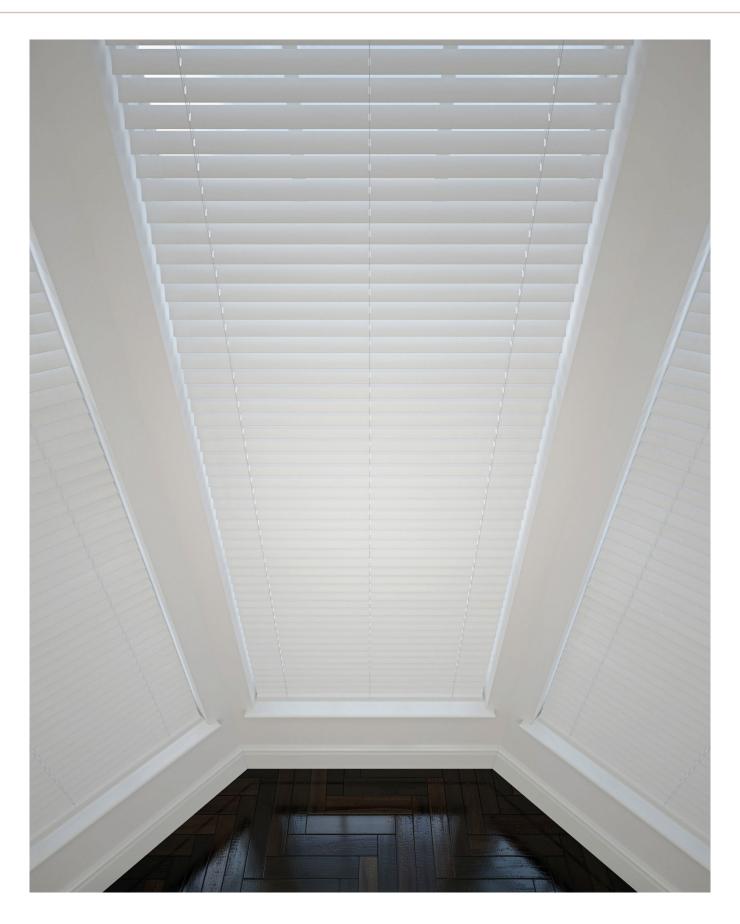

Sunwood® Fauxwood is a range of high quality PVC Venetians which emulate a sophisticated wood grain or a contemporary smooth finish which makes it the perfect solution for areas of high moisture such as bathrooms or kitchens.

SUNWOOD* FAUXWOOD VENETIAN BLIND - EXPLODED VIEW

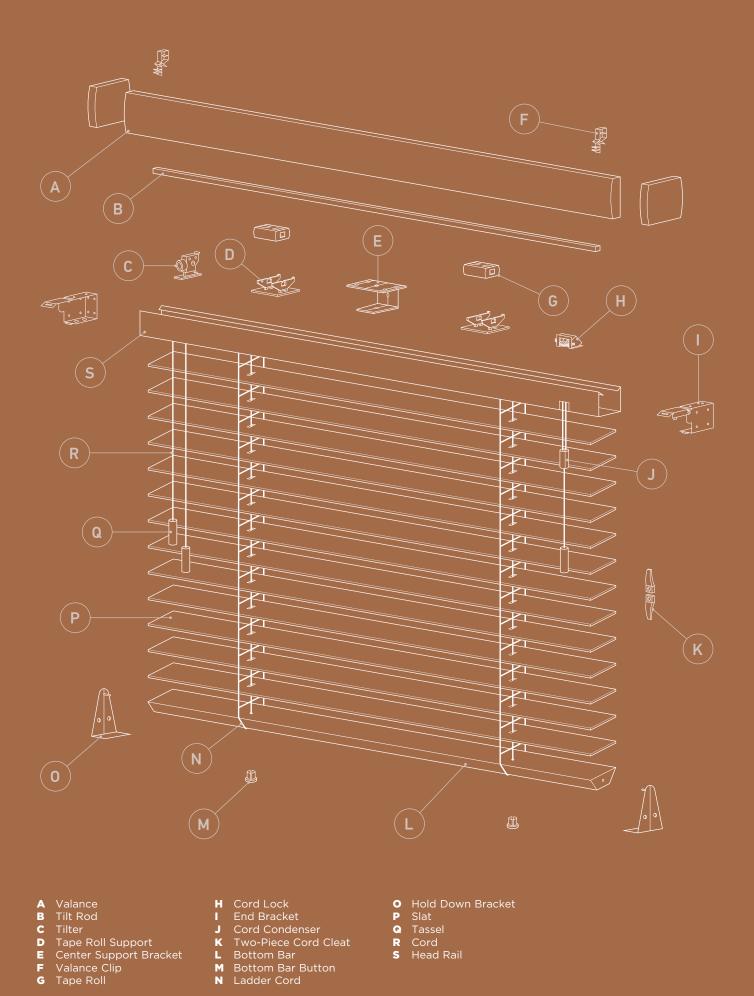

- Valance Tilt Rod
- A B

- Tilter
 Tape Roll Support
 Center Support Bracket
 Valance Clip
 Tape Roll D E
- F G

- O Hold Down BracketP Slat

- Q Tassel
 R Cord
 S Head Rail



PRODUCT INFORMATION FACT SHEET

SLAT WIDTHS	TAPE WIDTHS AVAILABLE
35mm	25mm
50mm	25mm or 38mm

The below chart shows the slat colours and the default tape colours for each.

FAUXWOOD COLOUR	DEFAULT TAPE COLOUR
True	Cotton
True Fine Grain	Cotton
Mirage	Chalk
Mirage Fine Grain	Chalk
Linara	Barley
Linara Fine Grain	Barley
Desert Oak	Hessian
Amber	Toffee
Stratus	Steel
Lima	Coffee
Callo	Coffee
Gravity	Mist
Gravity Fine Grain	Mist
Mantis	Pebble
Mantis Fine Grain	Pebble
Mission	Lunar
Mission Fine Grain	Lunar
Athena	Flint
Athena Fine Grain	Flint
Orion	Gallant
Orion Fine Grain	Gallant

Desert Oak, Amber, Stratus, Lima and Callo are only available as fine grain finishes.

COLOUR COORDINATION

- All parts of the blind are colour coordinated.
- The headrail, bottom bar buttons and cord condenser are colour co-ordinated PVC.
- Toggles are all colour matched wood.
- Cord and ladder braid are colour coordinated to slats.

Please Note: Due to PVC having a low heat distortion temperature, coupled with increased heat absorption of darker colours, a degree of warping may occur where blinds are subject to high levels of direct sunlight.

We would advise that in such areas lighter colours from the Sunwood faux wood collection and any colour from our Sunwood Real wood collection are selected.

DIMENSIONS OF FAUXWOOD HEADRAILS

35MM	42mm height x 42mm depth
50MM	42mm height x 59mm depth

BOXED BLINDS ARE SUPPLIED IN ONE DROP - 1400MM

1400mm -	3000mm on widths 350mm-1400mm
This can be lenghtened to:	2400mm on widths 1500mm-2600mm

MINIMUM & MAXIMUM WIDTHS & DROPS

MINIMUM WIDTH	290mm
MINIMUM DROP	150mm
MAXIMUM WIDTH	2600mm
MAXIMUM DROP	3000mm

NUMBER OF LADDERS PER BLIND

25MM & 35MM SLATS	
Width	No. of ladders
350mm-600mm	2
601mm-900mm	3
901mm-1300mm	4
1301mm-1500mm	5
1501mm-1800mm	6
1801mm-2100mm	7
2101mm-2400mm	8
2401mm-2600mm	9

50MM SLATS	
Width	No. of ladders
350mm-600mm	2
601mm-900mm	3
901mm-1300mm	4
1301mm-1500mm	5
1501mm-1800mm	6
1801mm-2100mm	7
2101mm-2500mm	8
2501mm-2600mm	9

(Alternative box size may be used to cover OOS, at management discretion)

CONTROL OPTIONS

- Standard control only.
- Raise on the right, tilt on the left.

ACCESSORIES

TAPES

26 tape options are available:



20

Herringbone Weave tapes, available in 2 sizes; **25mm and 38mm.**



10

Flatweave tapes available in **38mm** only.

Herringbone Weave tapes are the standard tape default;

- 25mm tape for 35mm slat
- 25mm and 38mm tape for 50mm slat

Flatweave tapes are an additional charge and charges are available as a separate price table.

Each Fauxwood colour has a Decora recommended tape option which co-ordinates with the slat colour.

Customers can choose an alternative tape. (Flatweave tapes will have an additional charge applied)

Tapes are secured to the bottom of the bottom bar using complimenting tape pins

VALANCE

- D-shaped valance.
- Valance clips are attached to head rail.
- Due to weight of PVC valance, dual locks are not used.
- Embossed blinds are finished with an embossed valance.



Valance Clip

VALANCE RETURNS/PELMETS

PLAIN FINISH	Default. Valance will be 12mm longer than the headrail of the blind.
SINGLE RETURN	Supplied with one mitred return. Internal measurement 13mm. External measurement 29mm.
DOUBLE RETURN	Supplied with two mitred returns. Internal measurement 14mm. External measurement 45mm.

(single and double returns can be attached to the pelmet prior to despatch if requested)

UNCUT	Valance will be left uncut and will be 50mm longer than the width of the blind. One end of the valance will be mitred and one will be straight.
SPECIFIED LENGTH	If a customer requests for a valance to be a specific length there will be no additional charge provided the valance is no longer than the blind width + 50mm. Any valance that is longer than this cannot be made from the valance supplied with the blind and will be charged as a valance extra.

ADDITIONAL VALANCE OPTIONS

SILVER CONTOUR VALANCE

- Available for Sunwood® Fauxwood.
- Available for 35mm and 50mm slat widths.
- Silver contour valance is manufactured from PVC and finished with silver lacquer.
- Valance attached to headrail using clear plastic valance clips (come as standard with valance).
- The valance clip slides into the groove at the back of the valance and the clip is then attached to the headrail.
- 35mm Valance size: 51mm x 6mm
 50mm Valance size: 64mm x 7mm
- Silver contour valance comes as standard with a specific tassel. One size is used for both raise and tilt operation.
 Tassels are colour matched to slat and produced from PVC.







Tassel

BOTTOM BAR

- Colour Co-ordinated trapezoid.
- Bottom bar is not embossed.
- Bottom bar is solid PVC.
- 35mm Bottom Bar size: **35mm depth x 13mm height**
- 50m Bottom Bar size: **50mm depth x 13mm height**
- Bottom Bar buttons have a pulley wheel; this is used for larger blinds (boxed blinds size: 1401mm wide up).
 This pulley wheels enables easier rise for wider blinds.

TASSELS

- Tassels will be colour matched wood as standard.
- Same design as Sunwood®. The raise will have 1 x large tassel and the tilt will have 2 x small tassels.
- There are options to have Metal tassels: Bullet, Bell or Cylinder all are available in 4 colours. (See below for options available.)
- If metal tassels are chosen all three raise and lift tassels will be the same size.

BULLET TASSEL



Chrome RT281



Matt Nickel RT282



Brushed Brass RT283



Black RT280

BELL TASSEL



Chrome RT292



Matt Nickel RT290



Brushed Brass RT293



Black RT291

CYLINDER TASSEL



Chrome WVH-TCCE



Matt Nickel
WVH-TCNL



Brushed Brass
WVH-TCBS



Black WVH-TCBK

BRACKETS

As standard all Fauxwood Blinds are supplied with 2 box brackets.

These brackets can be fixed in a number of ways;

TOP FIX	Bracket is screwed on to the top of the window recess
END FIX	Bracket is screwed on to the side of the window recess
FACE FIX	Bracket is screwed on to the front of the window frame

Blinds with 3 or more ladders will have a centre support bracket. This will depend on the width.

3 and 4 ladders	1 x centre support bracket		
5 ladders	2 x centre support brackets		
6 and 7 ladders	3 x centre support brackets		
8 and 9 ladders	4 x centre support brackets		



Box Brackets

Centre Support Bracket

DIMENSIONS

вох	35mm	50mm deep x 47mm high
BRACKET	50mm	65mm deep x 47mm high

HOLD DOWN BRACKETS

Hold down brackets are used to attach the bottom of the blind to a window or door to prevent it from swinging to and fro. There is a small hole on either end of the bottom bar. The hold down bracket is attached to the door with two screws then the tips of the brackets are inserted to the holes on the bottom bar.



Hold Down Bracket

STACK HEIGHT

The stacking height refers to the measurement from top to bottom when the blind is fully pulled up. These stacking heights should be treated as advice only. There is a slight variance in the slat thickness and in how the slats pack with the ladder therefore each individual blind will be different.

BLIND DROP (MM)	35MM SLAT STACK HEIGHT (MM)	50MM SLAT STACK HEIGHT (MM)
500	115	105
750	145	130
1000	170	145
1250	195	170
1500	220	190
1750	245	210
2000	270	230
2250	300	250
2500	325	270
2750	350	290
3000	375	310

CHILD SAFETY

All Sunwood* Fauxwood blinds come with a colour co-ordinated cord condenser and a two-part safety cleat.

The cord condenser is designed to consolidate the pull cords into one string and also to break-away, stopping any loops from forming. The safety cleat is used to wrap the cord around to keep out of children's reach.



Closed Open Top Bottom







Cord wrapped in a figure of eight motion

CORD LENGTHS AND INSTALLATION HEIGHTS

- If the installation height is known the distance from the floor to bottom of pull cords shall be at least 1.5m.
- If the installation height is **not** known but the drop of the blind is less than 2.5m, length of the pull cords shall be less than 1m.
- If the installation height is not known but the drop of the blind is more than 2.5m, length of the pull cords shall be less than drop of the blind minus 1.5m.
- The standard control length on Sunwood® Fauxwood are 2/3 the drop of the blind.
- If the control length is not within the child safety rules it will be reduced to the max length allowed by child safety.

All blinds are supplied with compliant warning stickers and warning tags.